


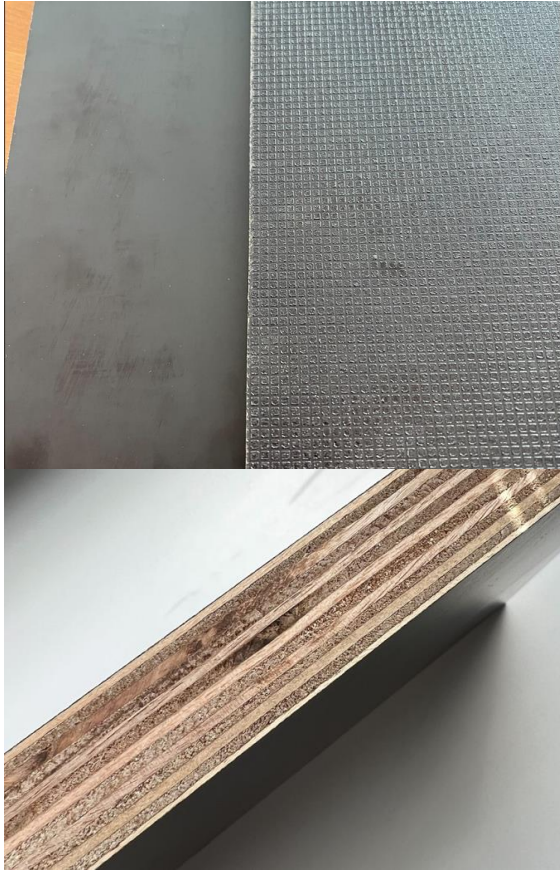

ITEM DESCRIPTION

- FILMFACED PLYWOOD
- Full poplar core
- 2x hotpress and 1x sanded

APPLICATION

- Construction

COUNTRY of ORIGIN - China

KEY FACTS

GRADE	F/F (I/I) / F/W (I/I)
SURFACE	Dark Brown Dynea film 120g/m ²
CORE	Poplar
F/B veneer	Poplar 1.5mm
SIZE (MM)	1250x2500x1250 2440x1220x2440
THICKNESS (ply)	12(7),15(9),18(11),21(13),24(15)
FORMALDEHYDE EMISSION	E1 by EN 13986:2004+A1:2015
GLUE BONDING	WBP (Phenolic) by EN 314
TOLERANCE	+/- 0.5-1mm as per request by EN 310
DENSITY (KG/m ³)	500-550 KG/m ³
CERTIFICATES	CE, FSC, CARB per request
M3 per 40HC	50m ³ (18 packs)

